



**CISA**<sup>®</sup>



**ALLEGION**<sup>™</sup>

MULTITOP  
RC

The evolution of Multitop Pro and Multitop Max.  
Compatible, secure, reliable.





MULTITOP  
RC

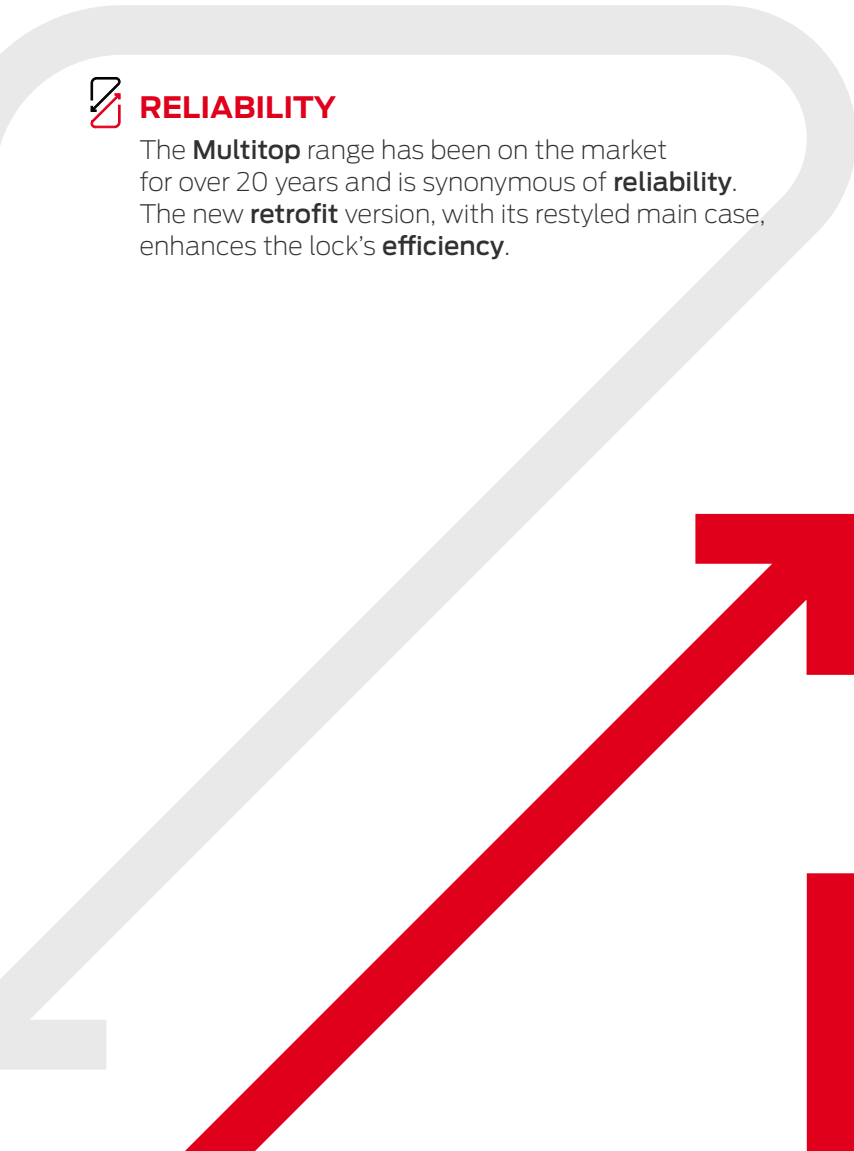
Compatible  
Secure  
Reliable

 **SECURITY**

The first priority of every **CISA** solution is **SECURITY**.  
The **RC** evolution of the **Multitop Pro** and **Max** range  
guarantees a high level of protection  
and makes it simple to install the lock on the door.

 **RELIABILITY**

The **Multitop** range has been on the market  
for over 20 years and is synonymous of **reliability**.  
The new **retrofit** version, with its restyled main case,  
enhances the lock's **efficiency**.



# Compatibility

The mechanical versions of Multitop PRO and Multitop MAX have evolved into **Multitop RC**, offering seamless retrofitting.

**Multitop RC** has been designed to replace all **CISA mechanical** locks from the Multitop, Multitop PRO and Multitop MAX ranges already installed and present on the market.

Installation is quick and easy, as no additional work is required on the door, and it can be carried out directly on site.

## RESTYLING

The restyling of the main case means it can be easily retrofitted to all earlier models.




# Multitop RC locks




## HIGH SECURITY

Locking system with hardened steel hook (CISA patent pending). Deadbolt with a thickness of 12 mm and horizontal sliding. Deadbolts independent of the central mechanism.



## RETROFITTING

Can easily be retrofitted to earlier models. Thanks to the restyling of the main case, no additional work is required on the door when upgrading from a previously installed version.




## COMPLETE DOOR COVERAGE

The standard 2300 mm height of the faceplate can be extended to 3000 mm to improve the appearance and security of the door.

 MULTITOP  
RC PRO




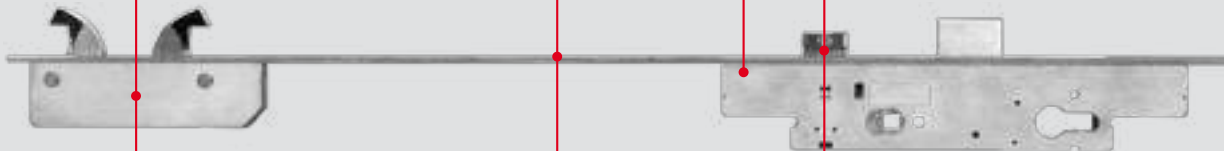 MULTITOP  
RC MAX



## CLOSED CASE

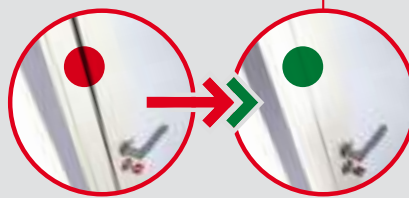The lock and diverter cases are closed, including the rod hooks to stop dirt or debris from working on the door interfering with the inner mechanisms.



## CORRECTS HEAT DISTORTION OF THE DOOR

The rack mechanism, which makes it easier to turn the key, and the deadbolts with their more rounded design, effectively correct distortion of the door due to sudden changes in temperature.




## VERSATILE LATCHBOLT

The latchbolt can be replaced with the roller directly from the lock faceplate (CISA patent pending).



### TOTAL PROTECTION

The lock is pre-set for 4th and 5th locking points to increase resistance to forced entry, especially on double leaf doors.



### RESISTANCE TO FORCED ENTRY

Locking system with four 10 mm thick hooks protected by a 4 mm thick hardened steel plate.

CISA patent registered.

High resistance to forced entry (2000 kg for lateral thrust and 1000 kg for forced entry by widening the profile).

Hook deadbolts independent of the central mechanism.

### TECHNICAL FEATURES

- Case thickness 15.5 mm
- Closed case
- Backset 25-30-35-40 mm
- Latchbolt interchangeable with roller
- Steel cover
- Top and bottom adjustable faceplate
- 11 to 17 mm adjustable latchbolt
- 2.5 to 16.5 mm adjustable roller
- 12 mm thick divertor deadbolts with 25 mm protrusion Multitop PRO RC series
- 10 mm thick hooks with 25 mm protrusion Multitop MAX RC series
- Pre-set for installation of microswitch on the divertor case.
- 8 mm square spindle
- DIN holes to fix the handle plate

### OPERATION

- The key activates the latchbolt and deadbolts, the handle activates the latchbolt
- The lock is equipped with a misalignment device

### FINISHES

- Zinc-plated cases and covers
- STAINLESS or BLACK PAINTED steel faceplate Multipop PRO RC series
- STAINLESS steel faceplate Multipop MAX RC series
- Nickel-plated deadbolts

### SUPPLIED AS STANDARD




- Pair of nylon roses item 1.06012.01.0.
- Lock and cylinder fixing screws
- Instruction sheet


### ON REQUEST



- Modular roller assembly
- Euro profile cylinder
- Adjustable metal strikers (see special Vademecum)
- Additional extension bolts for 4th and 5th locking points, item 1.06449.10/11.0
- Kit for bolt extensions up to 3000
- Threaded pin for fixing external rods
- Cylinder protective rose item 1.06460.05.0







### CERTIFICATIONS

- Short faceplate version in compliance with EN 12209:03  
Grade 6 Security – 1000 kg lateral thrust and 600 kg frontal thrust.
- Long faceplate version in compliance with prEN 15685:10  
Grade 6 Security – 1000 kg lateral thrust and 600 kg frontal thrust.  
Grade 7 Security – like Grade 6 with use of protective plates Series 06436
- Suitable for EN1627:11 certified doors up to resistance class WK/RC4
- Protective plate for grade 7 item 1.06436.10/11.0.

TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	NO. PCS	ITEM						
									TYPE	DIM.	HAND	FIN.	SPEC.		
	<ul style="list-style-type: none"> <li>▪ <b>STAINLESS STEEL</b> faceplate 22 x 3 mm</li> <li>▪ Deadbolt and latchbolt</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>▪ Threaded pins for fixing the extension bolts</li> </ul>	2	85	22	25	0.720	12	1	49225	25	0	00	RC		
		2	85	22	30	0.780	12	1	49225	30	0	00	RC		
		2	85	22	35	0.840	12	1	49225	35	0	00	RC		
		2	85	22	40	0.900	12	1	49225	40	0	00	RC		
	<ul style="list-style-type: none"> <li>▪ ON REQUEST</li> <li>- Internal curved extension bolt rods item 1.06441.00.0</li> <li>- Internal straight extension bolt rods item 1.06441.10.0</li> <li>- Pair of external rod controls item 1.06442.00.0</li> <li>- Lateral deadbolts for internal rods item 1.06443.31.0</li> <li>- Lateral deadbolts for external rods item 1.06443.36.0</li> </ul>	2	92	22	25	0.720	12	1	49228	25	0	00	RC		
		2	92	22	30	0.780	12	1	49228	30	0	00	RC		
		2	92	22	35	0.840	12	1	49228	35	0	00	RC		
		2	92	22	40	0.900	12	1	49228	40	0	00	RC		
		<ul style="list-style-type: none"> <li>▪ <b>STAINLESS STEEL</b> faceplate 22 x 3 mm</li> <li>▪ Deadbolt and roller</li> <li>▪ 2.5 to 16.5 mm adjustable roller</li> <li>▪ Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>▪ Threaded pins for fixing the extension bolts</li> </ul>	2	-	22	25	0.720	12	1	49250	25	0	00	RC	
			2	-	22	30	0.780	12	1	49250	30	0	00	RC	
		2	-	22	35	0.840	12	1	49250	35	0	00	RC		
		2	-	22	40	0.900	12	1	49250	40	0	00	RC		
<ul style="list-style-type: none"> <li>▪ ON REQUEST</li> <li>- Internal curved extension bolt rods item 1.06441.00.0</li> <li>- Internal straight extension bolt rods item 1.06441.10.0</li> <li>- Pair of external rod controls item 1.06442.00.0</li> <li>- Lateral deadbolts for internal rods item 1.06443.31.0</li> <li>- Lateral deadbolts for external rods item 1.06443.36.0</li> <li>- Inserts to install with the strikers for locks series 49250: item 1.06141.70.0 for item 1.06463.16/17/34/35.0 item 1.06141.71.0 for item 1.06463.05/31/32/33.0 item 1.06141.86.0 for item 1.06461.30/35.0</li> </ul>															
		<p><b>CENTRE DISTANCE 85 MM</b></p> <ul style="list-style-type: none"> <li>▪ U-shaped adjustable faceplate 24 x 7 mm in <b>BLACK PAINTED</b> steel, 2300 mm high</li> <li>- top adjustment 350 mm</li> <li>- bottom adjustment 150 mm</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ 3 lateral deadbolts</li> <li>▪ Nylon faceplate cover plugs</li> </ul>	3	2	85	24	25	3.310	1	1	49426	25	0	00	RC
			3	2	85	24	30	3.370	1	1	49426	30	0	00	RC
			3	2	85	24	35	3.430	1	1	49426	35	0	00	RC
			3	2	85	24	40	3.490	1	1	49426	40	0	00	RC
		<ul style="list-style-type: none"> <li>▪ U-shaped adjustable faceplate 24 x 5 mm in <b>BLACK PAINTED</b> steel, 2300 mm high</li> <li>- top adjustment 350 mm</li> <li>- bottom adjustment 150 mm</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ 3 lateral deadbolts</li> <li>▪ Nylon faceplate cover plugs</li> </ul>	3	2	85	24	25	3.310	1	1	49436	25	0	00	RC
		3	2	85	24	30	3.370	1	1	49436	30	0	00	RC	
		3	2	85	24	35	3.430	1	1	49436	35	0	00	RC	
		3	2	85	24	40	3.490	1	1	49436	40	0	00	RC	
	<ul style="list-style-type: none"> <li>▪ U-shaped adjustable faceplate 24 x 7 mm in <b>STAINLESS</b> steel, 2300 mm high</li> <li>- top adjustment 350 mm</li> <li>- bottom adjustment 150 mm</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ 3 lateral deadbolts</li> </ul>	3	2	85	24	25	3.310	1	1	49626	25	0	00	RC	
		3	2	85	24	30	3.370	1	1	49626	30	0	00	RC	
		3	2	85	24	35	3.430	1	1	49626	35	0	00	RC	
		3	2	85	24	40	3.490	1	1	49626	40	0	00	RC	
	<ul style="list-style-type: none"> <li>▪ U-shaped adjustable faceplate 24 x 5 mm in <b>STAINLESS</b> steel, 2300 mm high</li> <li>- top adjustment 350 mm</li> <li>- bottom adjustment 150 mm</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ 3 lateral deadbolts</li> </ul>	3	2	85	24	25	3.520	1	1	49636	25	0	00	RC	
		3	2	85	24	30	3.580	1	1	49636	30	0	00	RC	
		3	2	85	24	35	3.640	1	1	49636	35	0	00	RC	
		3	2	85	24	40	3.700	1	1	49636	40	0	00	RC	
	<p><b>CENTRE DISTANCE 92 MM</b></p> <ul style="list-style-type: none"> <li>▪ U-shaped adjustable faceplate 24 x 5 mm in <b>STAINLESS</b> steel, 2300 mm high</li> <li>- top adjustment 350 mm</li> <li>- bottom adjustment 150 mm</li> <li>▪ 11 to 17 mm adjustable latchbolt</li> <li>▪ 3 lateral deadbolts</li> </ul>	3	2	92	24	25	3.310	1	1	49638	25	0	00	RC	
		3	2	92	24	30	3.370	1	1	49638	30	0	00	RC	
	3	2	92	24	35	3.430	1	1	49638	35	0	00	RC		
	3	2	92	24	40	3.490	1	1	49638	40	0	00	RC		


TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	NO. PCS	ITEM					
									TYPE	DIM.	HAND	FIN.	SPEC.	
	<b>CENTRE DISTANCE 85 MM</b>	3	2	85	24	25	3.310	1	1	49526	25	0	00	RC
	▪ "Flat" adjustable faceplate 24 x 3 mm in <b>BLACK PAINTED</b> steel, 2300 mm high	3	2	85	24	30	3.370	1	1	49526	30	0	00	RC
	- top adjustment 350 mm	3	2	85	24	35	3.430	1	1	49526	35	0	00	RC
	- bottom adjustment 150 mm	3	2	85	24	40	3.490	1	1	49526	40	0	00	RC
	▪ 11 to 17 mm adjustable latchbolt													
	▪ 3 lateral deadbolts													
	▪ Nylon faceplate cover plugs													
	▪ "Flat" adjustable faceplate 24 x 3 mm in <b>STAINLESS</b> steel, 2300 mm high	3	2	85	24	25	3.310	1	1	49726	25	0	00	RC
	- top adjustment 350 mm	3	2	85	24	30	3.370	1	1	49726	30	0	00	RC
	- bottom adjustment 150 mm	3	2	85	24	35	3.430	1	1	49726	35	0	00	RC
	▪ 11 to 17 mm adjustable latchbolt	3	2	85	24	40	3.490	1	1	49726	40	0	00	RC
	▪ 3 lateral deadbolts													
<b>CENTRE DISTANCE 92 MM</b>														
▪ "Flat" adjustable faceplate 24 x 3 mm in <b>STAINLESS</b> steel, 2300 mm high	3	2	92	24	25	3.310	1	1	49728	25	0	00	RC	
- top adjustment 350 mm	3	2	92	24	30	3.370	1	1	49728	30	0	00	RC	
- bottom adjustment 150 mm	3	2	92	24	35	3.430	1	1	49728	35	0	00	RC	
▪ 11 to 17 mm adjustable latchbolt	3	2	92	24	40	3.490	1	1	49728	40	0	00	RC	
▪ 3 lateral deadbolts														

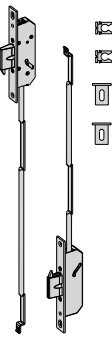TYPE	DESCRIPTION	FOR SERIES / ITEM	UNIT WEIGHT kg	NO. PCS	ITEM			
					TYPE	DIM.	HAND	
	▪ Pair of lateral locking points operated by internal rods	49225	1.060	12	1	06443	31	0
	▪ Horizontal sliding deadbolts with hardened steel inserts and hook	49250						
	▪ <b>STAINLESS</b> steel faceplate, 22 x 3 mm	19225						
	▪ Pre-set for 4th and 5th locking points							
	▪ Closed case							
	▪ SUPPLIED AS STANDARD:							
	- Pair of rods diameter 8 mm							
	- Pair of nylon faceplate spacers item 1.06141.65.0							
	- Rod guide item 1.06224.00.0 (2 pcs)							
	▪ ON REQUEST:							
	- Special strikers (see Vademecum)							
	- Internal straight extension bolts item 1.06441.10.0 for 4th and 5th locking points							
	- Threaded pin item 1.06449.05.0 for fixing the 4th and 5th locking point rods							
	▪ Pair of lateral locking points operated by external rods	49225	1.060	12	1	06443	36	0
	▪ Horizontal sliding deadbolts with hardened steel inserts and hook	49250						
	▪ <b>STAINLESS</b> steel faceplate, 22 x 3 mm	19225						
	▪ Pre-set for 4th and 5th locking points							
	▪ Closed case							
	▪ SUPPLIED AS STANDARD:							
	- Pair of external rod controls							
	- Pair of threaded pins							
	▪ ON REQUEST:							
	- Special strikers (see Vademecum)							
	- Threaded pin item 1.06449.05.0 for fixing the 4th and 5th external rod control item 1.06442.00.0							

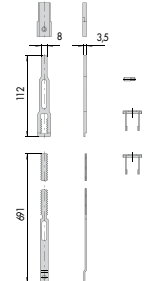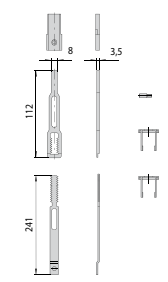TYPE	DESCRIPTION	FOR SERIES / ITEM	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	kg		ITEM				
							UNIT WEIGHT	NO. PCS	TYPE	DIM.	HAND		
	<ul style="list-style-type: none"> <li>Top extension bolt kit for doors up to 3000 mm.</li> <li>"U"-shaped adjustable faceplate 24 x 5 mm in <b>BLACK PAINTED</b> steel, 700 mm high</li> </ul>	19436 - 49436	2	-	24	-	0.900	1	1	06444	46	0	
	<ul style="list-style-type: none"> <li>As above, with "U"-shaped faceplate 24 x 7 mm</li> </ul>	19426 - 49426	2	-	24	-	0.900	1	1	06444	47	0	
	<ul style="list-style-type: none"> <li>Top extension bolt kit for doors up to 3000 mm.</li> <li>"U"-shaped adjustable faceplate 24 x 5 mm in <b>STAINLESS</b> steel, 700 mm high</li> </ul>	19636 - 49636 19638 - 49638	2	-	24	-	0.900	1	1	06444	66	0	
	<ul style="list-style-type: none"> <li>As above, with "U"-shaped faceplate 24 x 7 mm</li> </ul>	19626 - 49626	2	-	24	-	0.900	1	1	06444	67	0	
	<ul style="list-style-type: none"> <li>Top extension bolt kit for doors up to 3000 mm.</li> <li>"Flat" adjustable faceplate 24 x 3 mm in <b>BLACK PAINTED</b> steel, 700 mm high</li> </ul>	19526 - 49526	2	-	24	-	0.900	1	1	06444	56	0	
	<ul style="list-style-type: none"> <li>Top extension bolt kit for doors up to 3000 mm.</li> <li>"Flat" adjustable faceplate 24 x 3 mm in <b>STAINLESS</b> steel, 700 mm high</li> </ul>	19726 - 19728 49726 - 49728	2	-	24	-	0.900	1	1	06444	76	0	
	<ul style="list-style-type: none"> <li>Threaded pin for fixing the 4th and 5th additional locking point extension bolts.</li> </ul>		-	-	-	-	0.002	1	1	06449	05	0	
	<ul style="list-style-type: none"> <li>Additional TOP extension bolt to install with locks with "U"-shaped faceplate 24x7 mm.</li> </ul>		-	-	-	-	0.187	1	1	06449	10	0	
	<ul style="list-style-type: none"> <li>Additional FLOOR extension bolt to install with locks with "U"-shaped faceplate 24x7 mm.</li> </ul>		-	-	-	-	0.135	1	1	06449	11	0	
	<ul style="list-style-type: none"> <li>Protective rose for cylinders series RS3, ASTRAL, AP3 (with long key, CL special execution), AP4 and ASIX, in chrome-plated carbonitrided steel for 4A000 series, complete with: <ul style="list-style-type: none"> <li>- spacers 2 mm (19 pcs), 1 mm (2 pcs);</li> <li>- M5 x 75mm screws;</li> <li>- inside escutcheon.</li> </ul> </li> <li>FINISHES <ul style="list-style-type: none"> <li>- Gold polished steel (fin. 15).</li> </ul> </li> <li>ON REQUEST <ul style="list-style-type: none"> <li>- Pair of additional spacers for 65 to 87 mm wide profiles item 1.06141.87.0</li> </ul> </li> </ul>							0.485	1	1	06460	05	0



TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	NO. PCS	ITEM				
									TYPE	DIM.	HAND	FIN.	SPEC.



**CENTRE DISTANCE 85 MM**


- U-shaped adjustable faceplate 24 x 5 mm in STAINLESS steel, 2300 mm high
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- 11 to 17 mm adjustable latchbolt
- 4 hooks with **hardened steel inserts**.

3	2	85	24	25	3.310	1	1	49656	25	0	00	RC
3	2	85	24	30	3.370	1	1	49656	30	0	00	RC
3	2	85	24	35	3.430	1	1	49656	35	0	00	RC
3	2	85	24	40	3.490	1	1	49656	40	0	00	RC

**CENTRE DISTANCE 92 MM**

- U-shaped adjustable faceplate 24 x 5 mm in STAINLESS steel, 2300 mm high
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- 11 to 17 mm adjustable latchbolt
- 4 hooks with **hardened steel inserts**.

3	2	92	24	25	3.310	1	1	49658	25	0	00	RC
3	2	92	24	30	3.370	1	1	49658	30	0	00	RC
3	2	92	24	35	3.430	1	1	49658	35	0	00	RC
3	2	92	24	40	3.490	1	1	49658	40	0	00	RC



**CENTRE DISTANCE 85 MM**

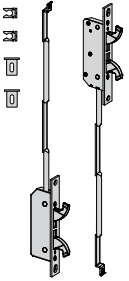

- "Flat" adjustable faceplate 24 x 3 mm in STAINLESS steel, 2300 mm high.
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- 11 to 17 mm adjustable latchbolt
- 4 hooks with **hardened steel inserts**.

3	2	85	24	25	3.310	1	1	49746	25	0	00	RC
3	2	85	24	30	3.370	1	1	49746	30	0	00	RC
3	2	85	24	35	3.430	1	1	49746	35	0	00	RC
3	2	85	24	40	3.490	1	1	49746	40	0	00	RC




**CENTRE DISTANCE 92 MM**

- "Flat" adjustable faceplate 24 x 3 mm in STAINLESS steel, 2300 mm high
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- 11 to 17 mm adjustable latchbolt
- 4 hooks with **hardened steel inserts**.

3	2	92	24	25	3.310	1	1	49748	25	0	00	RC
3	2	92	24	30	3.370	1	1	49748	30	0	00	RC
3	2	92	24	35	3.430	1	1	49748	35	0	00	RC
3	2	92	24	40	3.490	1	1	49748	40	0	00	RC

TYPE	DESCRIPTION	FOR SERIES / ITEM	ITEM		
			UNIT WEIGHT	NO. PCS	TYPE DIM. HAND
	<ul style="list-style-type: none"> <li>Pair of lateral locking points operated by internal rods</li> <li>4 hooks with <b>hardened steel</b> inserts.</li> <li><b>Stainless steel</b> faceplate 22 x 3 mm</li> <li>Closed case</li> <li>SUPPLIED AS STANDARD:                             <ul style="list-style-type: none"> <li>- Pair of rods diameter 8 mm</li> <li>- Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>- Rod guide item 1.06224.00.0 (2 pcs)</li> </ul> </li> <li>ON REQUEST:                             <ul style="list-style-type: none"> <li>- Special strikers (see Vademecum)</li> </ul> </li> </ul>	49225	1.000	1	1 06443 41 0
		49250			
		49228			
		19225			
	<ul style="list-style-type: none"> <li>Pair of lateral locking points operated by external rods</li> <li>4 hooks with <b>hardened steel</b> inserts.</li> <li><b>Stainless steel</b> faceplate 22 x 3 mm</li> <li>Closed case</li> <li>SUPPLIED AS STANDARD:                             <ul style="list-style-type: none"> <li>- Pair of external rod controls</li> <li>- Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>- Pair of threaded pins</li> </ul> </li> <li>ON REQUEST:                             <ul style="list-style-type: none"> <li>- Special strikers (see Vademecum)</li> </ul> </li> </ul>	49225	0.766	1	1 06443 46 0
		49250			
		49228			
		19225			


Accessories

TYPE	DESCRIPTION	FOR SERIES / ITEM	ITEM		
			UNIT WEIGHT	NO. PCS	TYPE DIM. HAND
	<ul style="list-style-type: none"> <li>MODULAR roller assembly</li> <li>SUPPLIED AS STANDARD                             <ul style="list-style-type: none"> <li>- nylon insert item 1.06141.70.0</li> <li>- nylon insert item 1.06141.71.0</li> <li>- nylon insert item 1.06141.86.0</li> </ul> </li> </ul>		0.060	12	1 06000 00 0
	<ul style="list-style-type: none"> <li>Lock protective plate to increase drill resistance (grade 7 prEN 15685:10)</li> </ul>		0.060	12	1 06436 10 0
	<ul style="list-style-type: none"> <li>Divertors protective plate to increase drill resistance (grade 7 prEN 15685 :10)</li> </ul>		0.060	12	1 06436 11 0

ADJUSTABLE METAL STRIKERS FOR USE WITH MULTITOP LOCKS

Striker for main lock (order 1 pc)	Striker for top/bottom locking points (order 2 pcs)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.67.0	1.06465.57.0
1.06463.68.0	1.06465.58.0
1.06463.82.0	1.06465.72.0
1.06463.83.0	1.06465.73.0
1.06463.84.0	1.06465.74.0
1.06463.85.0	1.06465.75.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

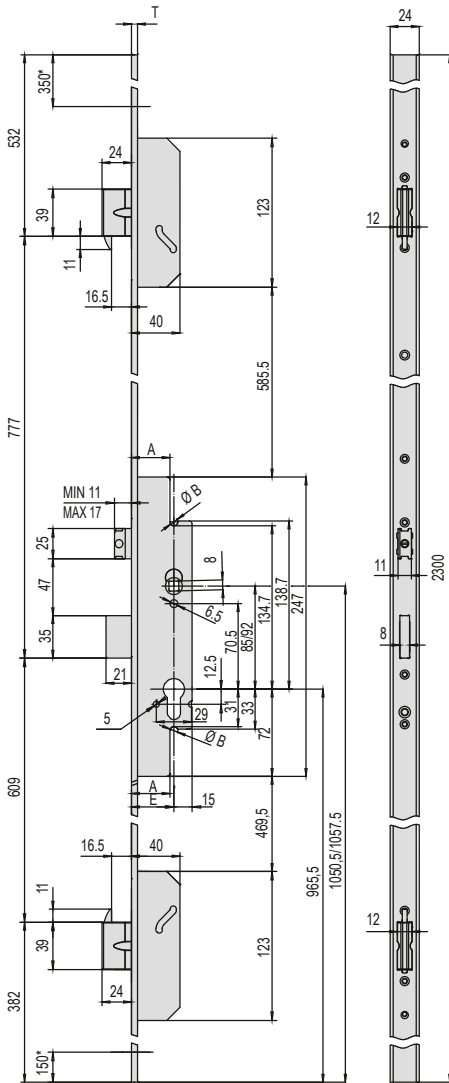**MULTITOP**  
**RC** PRO




**49526, 49726,  
49728**



**49436, 49636,  
49638**




**49426, 49626**



\*RASABILITA'  
T=3-5-7


E =	25	30	35	40
A =	31.8	36.8	31.8	36.8
B =	/	/	6.5	6.5

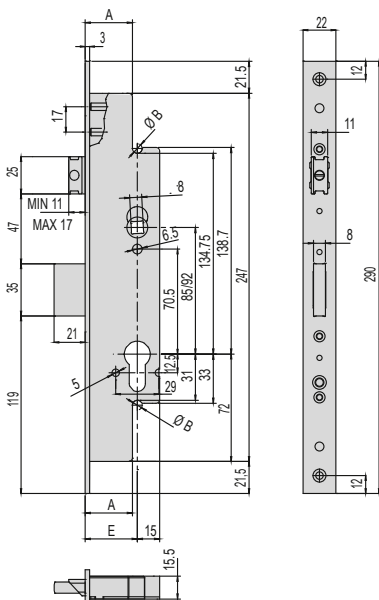

E =	25	30	35	40
A =	31.8	36.8	31.8	36.8
B =	/	/	6.5	6.5

**49225, 49228**

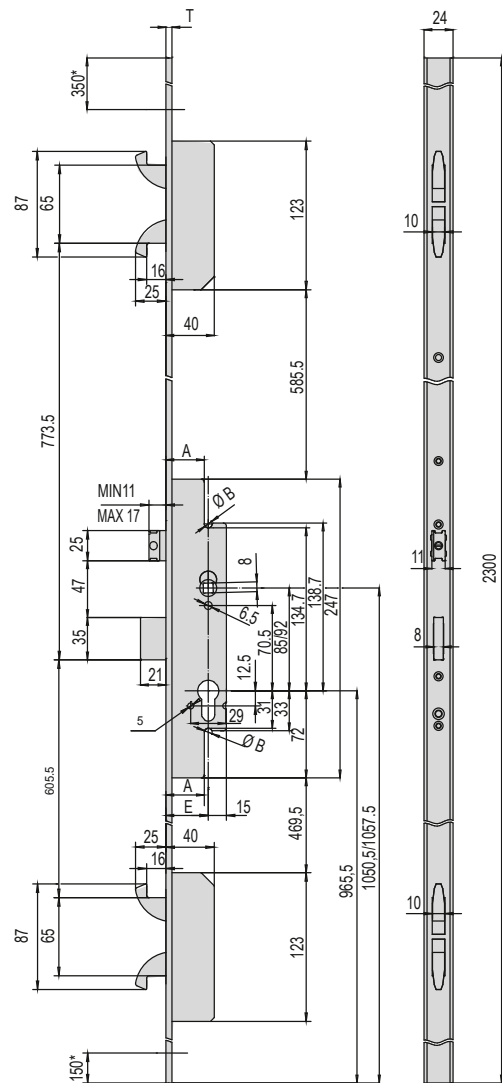
**MULTITOP**  
**RC** MAX



**49746, 49748**



**49656, 49658**



\*RASABILITA'  
T=3-5-7


E =	25	30	35	40
A =	31.8	36.8	31.8	36.8
B =	/	/	6.5	6.5


## About Allegion


Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions.





For more, visit [allegion.com](https://allegion.com).



 CISA SpA  
Via Oberdan 42  
48018 Faenza (RA) Italy

 Ph. +39 0546 677111  
Fax +39 0546 677150

 Customer Service and Technical Support  
+39 0546 188 0070

    [cisa.com](https://cisa.com)  
[cisa.sales@allegion.com](mailto:cisa.sales@allegion.com)